



KEY FEATURES

- Simple handling
- Good value solution
- Lean concept
- High reliability
- Also available as unit (without column) to be integrated in machinery
- According to the required riveting force, 3 different riveting units can be applied.

PROCESS CONTROL


RC-30: Control unit by time setting

- 4.3" Touchscreen, LED-backlit
- Control Software on SD card – SW updates via SD card possible
- Total hardware in semiconductor technology executed
- All connections on the back side conducted by plugs
- Housing in sheet metal construction, IP 53
- Stroke counter and hour counter – resettable
- Total stroke counter and hour counter – not resettable

MAIN DIMENSIONS

Model	kN	H	A	B	D	I	L	K
SN 170	1.8-6.6	5-30	585-615	173	125-155	744-899	195-350	408
SN 220	3.8-12	5-40	626-666	185	145-185	756-911	185-340	408
SN 270	5.8-17	5-40	689-729	211	166-206	864-1025	241-402	530

Further dimensions: please ask for our detailed dimensional drawings.

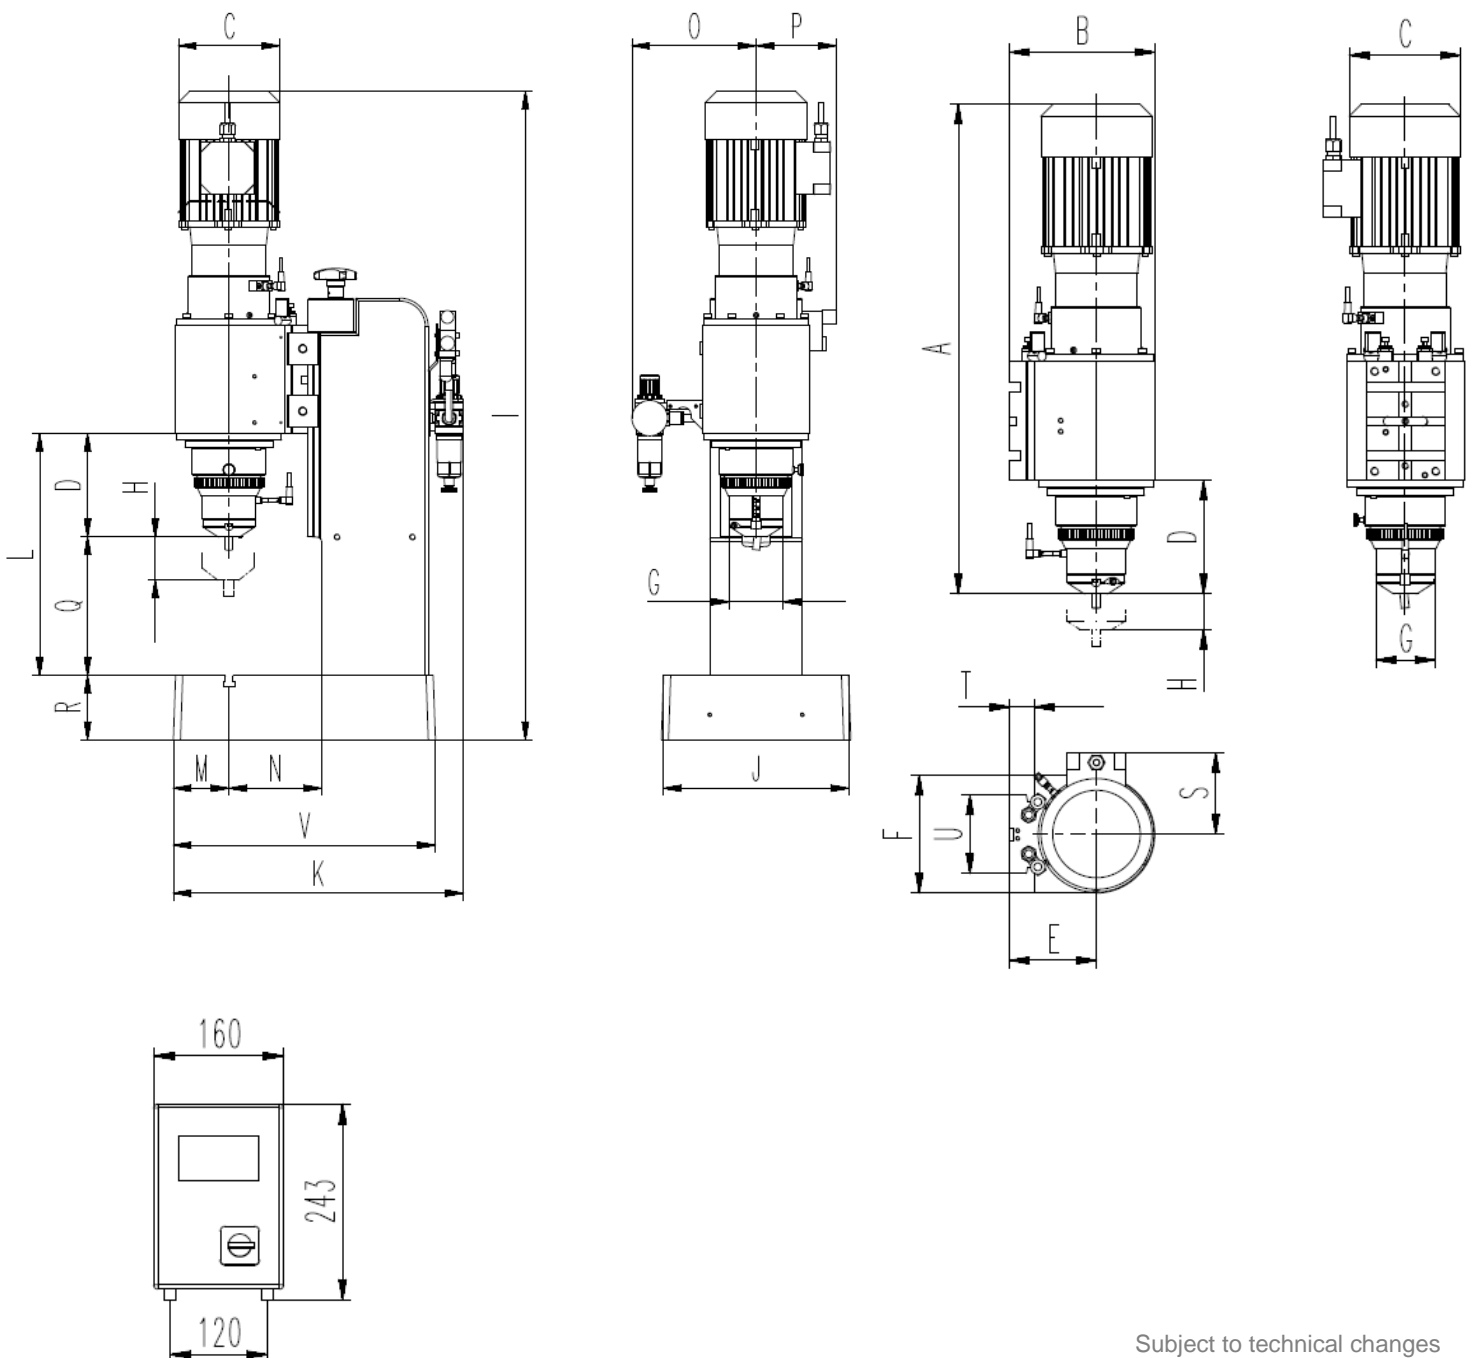

Subject to technical changes